

RESILIENT

PRIME
luxury vinyl plank



109 Mellow oak



400 Weathered Barnboard




405 Whispering Wood



509 Washed Oak




532 Greyed Oak

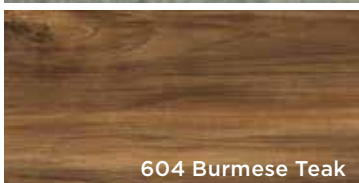

604 Burmese Teak



703 Deep Mahogany

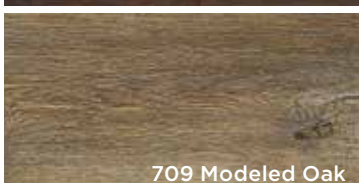

709 Modeled Oak



717 Tattered Barnboard



723 Vintage Oak

PRIME

RESILIENT

Style Number	0616V
Construction	Direct Glue
Thickness	2mm
Wear Layer	6mil
Size	7" x 48"
Finish	OptiClean Urethane
Edge description	Square
SF per carton	34.98
SF per pallet	2,798.40
Installation	Adhesive full spread
Classification	Good

Features

- Emulates the top species and colors of hardwood
- Ten colors to choose from

Suggested Adhesive

Style Name	Style Number
Shaw 200 TPS Adhesive	052VS 1 gal 026VS 4 gal
Shaw S150 Spray Adhesive	069VS 22 oz can
Kwik Flash	081VS 1 gal 080VS 4 gal

Coordinating Trim



Benefits

